

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH  
EN 15804+A2+AC,  
ISO 14025,  
ISO 21930

## GEBERIT WALL-HUNG WC SET

Geberit International AG

EPD HUB, HUB-3268

Published: 11.05.2025

Last updated: 11.05.2025

Valid until: 11.05.2030

Created with One Click LCA



**KNOW  
HOW**  
INSTALLED

## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	Geberit International AG
Address	Schachenstrasse 77, 8645 Jona, Switzerland
Contact details	sustainability@geberit.com
Website	www.geberit.com

### EPD STANDARDS, SCOPE AND VERIFICATION

Programme operator	EPD Hub, hub@epdhub.com
Reference standards	EN 15804+A2:2019+AC:2021 ISO 14025 ISO 21930
PCR	EPD Hub Core PCR Version 1.1, 5 Dec 2023
Sector	Construction product
Category of EPD	Third-party-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4 and D
EPD author	Georg Nauenburg
EPD verification	Independent verification of this EPD and data according to ISO 14025 <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
EPD verifier	Sarah Curpen, as an authorised verifier acting for EPD Hub Limited

The manufacturer retains the sole ownership of, liability and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT

Product name	Geberit Wall-hung WC Set
Additional labels	-
Product reference	502.774.00.1
Place of production	Haldensleben, Germany
Period for data	01.01.2024 – 31.12.2024
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	-

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 piece of Geberit Wall-hung WC Set
Declared unit mass	25.8 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	43.9
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	41.3
Secondary material, inputs (%)	6.2
Secondary material, outputs (%)	14.2
Total energy use, A1-A3 (kWh)	211
Total water use, A1-A3 (m <sup>3</sup> e)	0.57

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Geberit wants to play a leading role in the transition towards a sustainable sanitary industry. Sustainability has formed an integral component of the corporate strategy for more than 30 years. The Geberit Group has a group ISO certificate in accordance with ISO 9001 (quality), ISO 14001 (environment) and ISO 45001 (occupational health and safety). The company prepared life cycle assessments for key products from an early stage, and eco-design has been an integral part of the product development process since 2007. You can find comprehensive information on sustainability in the current annual report or at <https://www.geberit.com/company/sustainability>

### PRODUCT DESCRIPTION

Geberit offers a full range of washdown wall-hung WC sets including seats. Toilets are available with rimfree design and TurboFlush flush technology.

Our included toilet seats are made out of Duroplast material and have soft-close and quick-release hinges. Our offer includes WC in round or square design.

Further information is available in the local online product catalogue.

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	04	Europe
Minerals	85	Europe
Fossil materials	11	Europe
Bio-based materials	0	-

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.7

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 piece of Geberit Wall-hung WC Set
Mass per declared unit	25.8 kg
Functional unit	Four small and one large flush with water for removal of human urine and faeces, daily for four persons over 40 years.
Reference service life	40 years

### REACH – SUBSTANCES OF VERY HIGH CONCERN (SVHC)

The product does not contain any REACH SVHC substances in amounts greater than 0.1 % (1,000 ppm).

# PRODUCT LIFE CYCLE

## SYSTEM BOUNDARY

This EPD covers the life cycle modules listed in the following table.

Product stage			Construction stage		Use stage							End-of-life stage				Beyond system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	x	x	MND	MND	MND	x	x	x	x	x	x			x
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

MND = Modules not declared. MNR = Modules not relevant

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. The energy used by machines, and handling of waste formed in the production processes at the manufacturing facilities are also included in this stage. Furthermore, the study considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The product consists of a sanitary ceramic WC pan, a WC seat ring and lid, as well as mounting components. For the supply of raw materials, the total input of raw materials was mapped with corresponding European data. Further information on supply chain sustainability and material purchasing can be found in the Geberit Annual Report.

Transport from suppliers to Geberit is modelled based on material- class-specific transport distances. The individual transport distances of each

supplier are averaged according to the corresponding sales volumes. All A2 transports are carried out by lorry.

The ceramic pan is manufactured in Haldensleben (DE). For details regarding ceramic production, please see the EPD *Geberit Sanitary Ceramic*. The metal structure is made in Matrie a. Br. (AT) and powder-coated externally. Plastic components are produced in Jona (CH) and Pfullendorf (DE) plants. All components are transported to Haldensleben (DE) for final assembly and packaging. All Geberit plants involved are certified according to ISO 9001, ISO 14001 and ISO 45001. The current Group ISO certificate can be downloaded from <https://www.geberit.com>. A high share of production waste from plastic injection-moulding is recycled internally. The sources of electricity consumed in the Jona, Matrie a. Br. and Pfullendorf plants for the manufacturing process are modelled on 100 % renewable sources.

The production and provision of packaging material are modelled in A3. The finished product is packaged normally with cardboard, plastic bags and the user manual. Other packaging materials fall under the cut-off rules.

The manufacturing waste is assumed to be sent to the closest waste disposal facilities by lorry, which is estimated to be 50 km away. The type of waste treatment is determined on the basis of the material class, as explained in the section Product end-of-life.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts resulting from final products delivery to construction site (A4) cover direct fuel exhaust emissions and environmental impacts of fuel production, as well as related infrastructure emissions.

Transport from Geberit to customers within Europe is carried out by logistics partners via several local logistics centres mostly close to the production plants. Distribution to countries outside Europe is not taken into account due to lack of relevance.

The following information has been considered:

- The majority of transport within Europe is carried out by lorry. Therefore, intercontinental transport by sea and air is not considered.
- The majority of vehicles in use are > 32 t Euro 6 class (> 85 %).
- The average transport distance in Europe from the production sites to the Logistics Centres and to the consumers is approximately 600 km.

Further information on logistics and how we consider ecological aspects of transport can be found in the Geberit Annual Report.

In A5, there is no relevant environmental impact during installation. The installation should be carried out by a professional plumber.

Therefore, it is only the preparation of the waste treatment of packaging materials that is taken into account in A5. Cardboard and paper are assumed to be fully recycled. Plastics are assumed to be disposed of in the municipal waste incineration plant.

### PRODUCT USE AND MAINTENANCE (B1-B7)

For the use of the product (B1), toilet paper is considered. Periodic maintenance (B2) covers regular cleaning. Geberit Sanitary ceramic has a service life of at least 40 years. For the seat and lid, replacement (B4) every 15 years has been calculated. The product does not consume electricity. Water consumption (B7) for flushing the toilet is considered with six litres for large flush and three litres for small flush. However, the TurboFlush technology of the ceramic and most flush valves allow even lower flush volumes to be set. Furthermore, the use of greywater or rainwater is also possible for the toilet flush.

The reference use scenario includes the following assumptions: a four-person household, one major and four minor bathroom visits each day.


An alternative use stage scenario has been calculated. Two assumptions were made for this that differ from those of the regular scenario. Firstly, in B1 recycled toilet paper is used instead of virgin toilet paper. Furthermore, in B7 it is assumed that the flush valve is set for the large flush from six to four litres and for the small flush from three to two litres. The corresponding results are listed in the Annex.

### PRODUCT END-OF-LIFE (C1-C4, D)

As the consumption of energy and natural resources is negligible for disassembling the end-of-life product, the impact of demolition is assumed to be zero (C1).

It is generally assumed that all waste is collected and professionally separated after demolition on the construction site. The end-of-life product is assumed to be sent to the closest waste disposal facilities by lorry, which are estimated to be 50 km away (C2). The type of waste treatment is determined on the basis of the material class. Plastics are disposed of in the municipal waste incineration plant. Although the plastic components of the product are very well suitable for recycling due to their material properties, they are conservatively modelled with thermal energy recovery (C3). Metals are assumed to be 95 % recycled and 5 % going to landfill (C4). The mineral material of the product is assumed to be disposed of in the inert material landfill. The product is not biodegradable. In module D, the thermal treatment of plastic generates benefits. This covers energy and heat produced from the incineration in a waste incineration plant. Packaging material waste in A5 has benefits and loads that are also considered.

# MANUFACTURING PROCESS

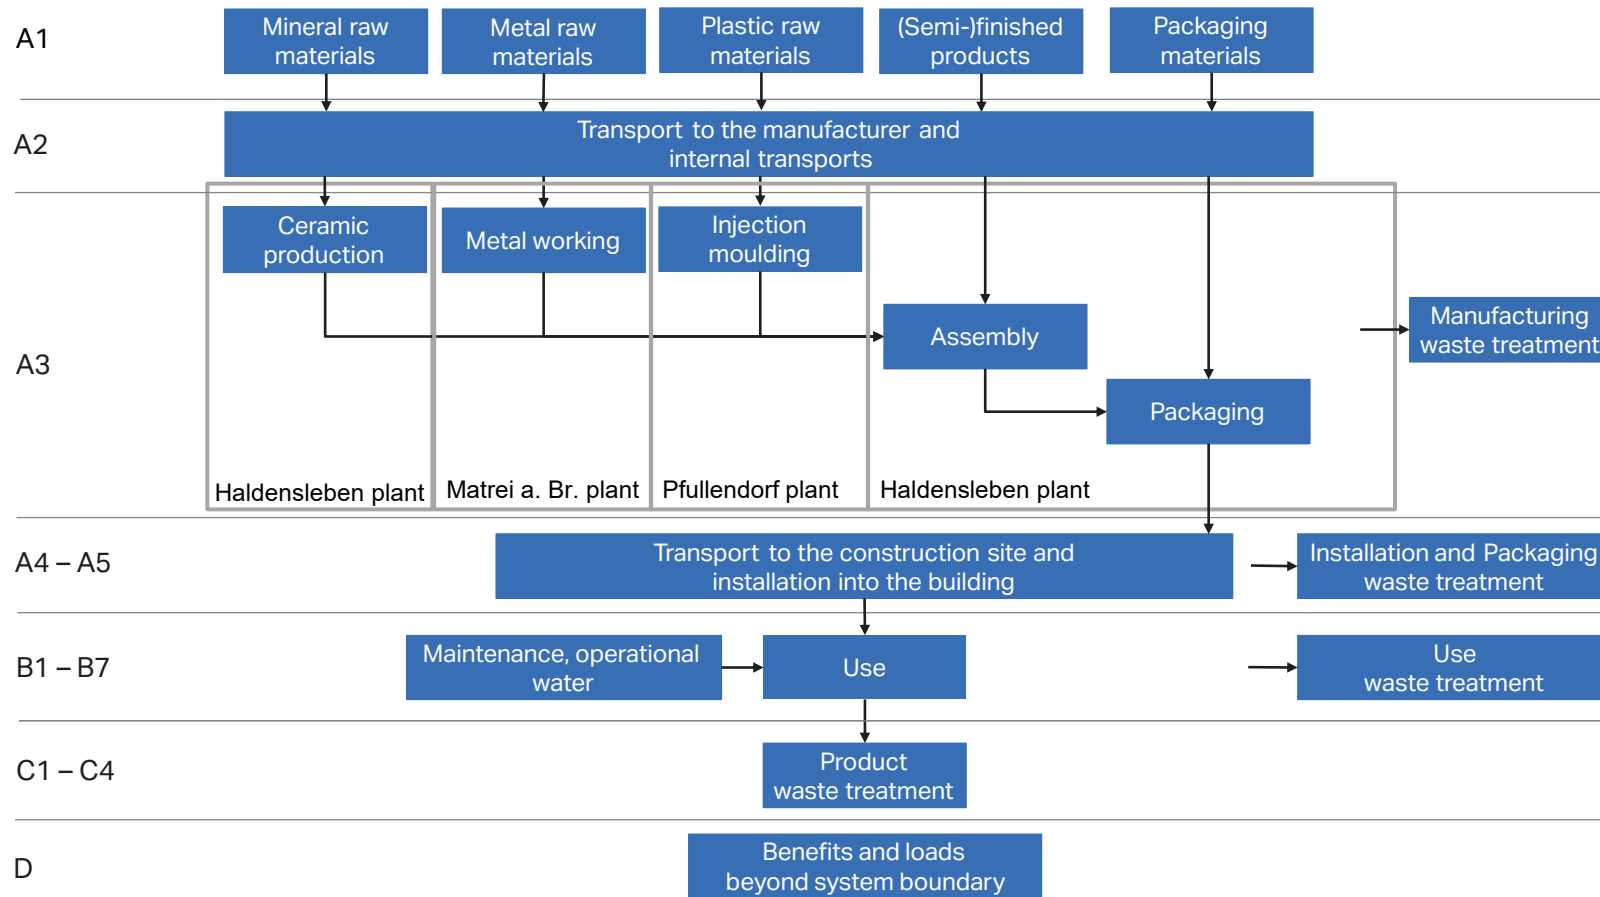

# LIFE CYCLE ASSESSMENT

## CUT-OFF CRITERIA

The study does not exclude any modules or processes that are stated as mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes for which data is available are included in the calculation. There is no neglected unit process with more than 1 % of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5 % of energy use or mass.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are made as per the reference standards and the applied PCR. In this study, allocations have been made in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	No allocation
Manufacturing energy and waste	Allocated by mass or volume

## AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	-
Variation in GWP-fossil for A1-A3	-

This EPD is product and factory-specific and does not contain average calculations.

## LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using the One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards, ISO 14040 and ISO 14044. Ecoinvent 3.10 and One Click LCA databases were used as sources of environmental data.

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP <sup>1)</sup> -total	kg CO <sub>2</sub> e	4,16E+01	3,84E-01	-7,40E-01	4,13E+01	1,60E+00	2,83E+00	2,43E+03	2,53E+01	0	2,33E+01	0	0	6,03E+02	0,00E+00	1,29E-01	6,96E+00	1,27E-01	-2,33E+00
GWP-fossil	kg CO <sub>2</sub> e	4,16E+01	3,84E-01	1,89E+00	4,39E+01	1,60E+00	1,31E-01	2,38E+03	2,52E+01	0	2,32E+01	0	0	6,02E+02	0,00E+00	1,29E-01	6,96E+00	1,27E-01	-2,34E+00
GWP-biogenic	kg CO <sub>2</sub> e	0,00E+00	0,00E+00	-2,70E+00	-2,70E+00	0,00E+00	2,70E+00	-9,49E-20	0,00E+00	0	1,11E-16	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP-luluc <sup>2)</sup>	kg CO <sub>2</sub> e	3,22E-02	1,49E-04	7,34E-02	1,06E-01	6,23E-04	3,56E-05	5,20E+01	4,74E-02	0	3,38E-02	0	0	1,03E+00	0,00E+00	5,77E-05	2,91E-04	7,25E-05	3,70E-03
Ozone depletion pot.	kg CFC <sub>-11</sub> e	4,92E-06	8,01E-09	5,18E-08	4,98E-06	3,34E-08	4,08E-10	1,97E-05	2,14E-05	0	4,36E-07	0	0	8,17E-06	0,00E+00	1,90E-09	4,32E-09	3,67E-09	-1,04E-08
Acidification potential	mol H <sup>+</sup> e	1,72E-01	9,06E-04	8,95E-03	1,81E-01	3,77E-03	2,04E-04	1,94E+01	9,95E-02	0	5,71E-02	0	0	3,51E+00	0,00E+00	4,40E-04	2,65E-03	8,99E-04	-6,92E-02
EP <sup>3)</sup> -freshwater	kg Pe	4,59E-03	2,68E-05	1,04E-03	5,65E-03	1,12E-04	1,28E-05	1,48E+00	5,54E-03	0	3,65E-03	0	0	1,55E+00	0,00E+00	1,00E-05	6,49E-05	1,04E-05	-5,67E-03
EP-marine	kg Ne	2,90E-02	2,38E-04	4,35E-03	3,35E-02	9,90E-04	8,61E-05	3,31E+00	2,34E-02	0	1,41E-02	0	0	1,94E+01	0,00E+00	1,45E-04	1,49E-03	3,43E-04	-4,64E-03
EP-terrestrial	mol Ne	2,94E-01	2,57E-03	2,95E-02	3,26E-01	1,07E-02	5,80E-04	3,02E+01	2,27E-01	0	1,37E-01	0	0	8,95E+00	0,00E+00	1,57E-03	1,18E-02	3,74E-03	-5,89E-02
POCP <sup>4)</sup> ('smog')	kg NMVOCe	1,02E-01	1,57E-03	7,94E-03	1,12E-01	6,56E-03	1,82E-04	8,88E+00	6,80E-02	0	5,20E-02	0	0	2,18E+00	0,00E+00	6,48E-04	3,22E-03	1,34E-03	-1,72E-02
ADP-minerals & metals	kg Sbe	5,12E-04	1,10E-06	8,17E-06	5,22E-04	4,58E-06	4,61E-07	5,18E-03	6,11E-04	0	1,03E-04	0	0	3,51E-03	0,00E+00	3,60E-07	2,03E-06	2,02E-07	-8,41E-04
ADP <sup>5)</sup> -fossil resources	MJ	6,84E+02	5,76E+00	2,92E+01	7,19E+02	2,40E+01	4,66E-01	2,65E+04	3,42E+02	0	2,53E+02	0	0	9,64E+03	0,00E+00	1,87E+00	3,34E+00	3,11E+00	-3,01E+01
Water use	m <sup>3</sup> e depr.	3,45E+03	2,95E-02	5,87E+00	3,46E+03	1,23E-01	1,55E-02	1,39E+03	1,61E+01	0	1,90E+01	0	0	3,27E+02	0,00E+00	9,25E-03	4,48E-01	8,98E-03	-1,08E+00

1) GWP = Global warming potential; 2) luluc = land use and land use change; 3) EP = Eutrophication potential; 4) POCP = Photochemical ozone creation potential; 5) ADP = Abiotic depletion potential

## ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1,71E-06	3,74E-08	8,94E-08	1,84E-06	1,56E-07	2,80E-09	2,35E-04	7,82E-07	0	6,46E-07	0	0	3,51E-05	0,00E+00	1,29E-08	3,46E-08	2,05E-08	-2,29E-07
Ionizing radiation	kBq U235e	3,11E+00	6,95E-03	2,27E-01	3,34E+00	2,90E-02	4,26E-03	1,63E+02	2,44E+00	0	1,02E+00	0	0	1,90E+02	0,00E+00	1,63E-03	1,44E-02	1,96E-03	-3,63E-01
Ecotoxicity, freshwater	CTUe	3,56E+02	6,79E-01	1,65E+01	3,73E+02	2,83E+00	5,18E-01	1,23E+04	1,28E+02	0	5,60E+01	0	0	4,85E+04	0,00E+00	2,65E-01	1,29E+01	2,61E-01	-8,77E+01
Human toxicity, cancer	CTUh	7,63E-08	6,39E-11	6,15E-10	7,70E-08	2,66E-10	3,78E-11	8,75E-07	7,26E-09	0	1,03E-07	0	0	7,83E-07	0,00E+00	2,13E-11	7,22E-10	2,34E-11	-5,52E-09
Human tox. non-cancer	CTUh	3,82E-07	3,72E-09	1,51E-08	4,01E-07	1,55E-08	1,29E-09	3,17E-05	2,20E-07	0	1,46E-07	0	0	8,81E-05	0,00E+00	1,21E-09	2,20E-08	5,37E-10	-6,04E-07
SQP <sup>6)</sup>	-	2,59E+02	5,80E+00	7,65E+01	3,41E+02	2,42E+01	3,85E-01	8,87E+04	2,59E+02	0	5,94E+01	0	0	3,16E+03	0,00E+00	1,89E+00	2,91E+00	6,13E+00	-9,36E+01

6) SQP = Potential soil quality index

## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER <sup>7)</sup> as energy	MJ	8,43E+01	9,38E-02	6,24E+00	9,06E+01	3,91E-01	-2,52E+01	1,33E+04	6,40E+01	0	2,42E+01	0	0	1,66E+03	0,00E+00	2,57E-02	2,40E-01	3,00E-02	-1,75E+01
Renew. PER as material	MJ	0,00E+00	0,00E+00	2,35E+01	2,35E+01	0,00E+00	-2,35E+01	0,00E+00	0,00E+00	0	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	8,43E+01	9,38E-02	2,97E+01	1,14E+02	3,91E-01	-4,87E+01	1,33E+04	6,40E+01	0	2,42E+01	0	0	1,66E+03	0,00E+00	2,57E-02	2,40E-01	3,00E-02	-1,75E+01
Non-ren. PER as energy	MJ	6,36E+02	5,76E+00	2,64E+01	6,68E+02	2,40E+01	-1,90E+00	2,59E+04	2,22E+01	0	-1,15E+02	0	0	9,64E+03	0,00E+00	1,87E+00	-2,04E+02	3,11E+00	-3,02E+01
Non-ren. PER as material	MJ	0,00E+00	0,00E+00	1,48E+00	1,48E+00	0,00E+00	-1,48E+00	0,00E+00	0,00E+00	0	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-ren. PER	MJ	6,36E+02	5,76E+00	2,79E+01	6,70E+02	2,40E+01	-3,38E+00	2,59E+04	2,22E+01	0	-1,15E+02	0	0	9,64E+03	0,00E+00	1,87E+00	-2,04E+02	3,11E+00	-3,02E+01
Secondary materials	kg	1,61E+00	2,49E-03	1,73E+00	3,34E+00	1,04E-02	1,12E-03	4,26E+00	9,61E-02	0	6,70E-01	0	0	2,43E+01	0,00E+00	7,97E-04	1,02E-02	7,82E-04	9,66E-01
Renew. secondary fuels	MJ	4,48E-01	3,14E-05	1,63E-01	6,11E-01	1,31E-04	6,02E-06	7,79E-01	2,69E-02	0	5,13E-02	0	0	2,80E-02	0,00E+00	1,01E-05	1,05E-04	1,62E-05	-2,84E-04
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m <sup>3</sup>	4,30E-01	8,51E-04	1,38E-01	5,69E-01	3,55E-03	3,07E-04	3,48E+01	3,81E-01	0	4,43E-01	0	0	5,79E+00	0,00E+00	2,77E-04	7,46E-03	3,24E-03	-3,77E-02

7) PER = Primary energy resources

## END-OF-LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	3,33E+00	8,34E-03	1,16E-01	3,45E+00	3,48E-02	6,23E-03	2,03E+02	1,02E+00	0	1,37E+00	0	0	5,56E+01	0,00E+00	3,17E-03	1,31E-01	3,44E-03	-4,67E-01
Non-hazardous waste	kg	7,56E+01	1,67E-01	3,60E+00	7,94E+01	6,96E-01	1,98E-01	5,78E+03	1,80E+02	0	2,68E+01	0	0	1,07E+06	0,00E+00	5,87E-02	3,77E+00	7,86E-02	-2,26E+01
Radioactive waste	kg	1,22E-03	1,72E-06	5,80E-05	1,28E-03	7,16E-06	1,09E-06	4,02E-02	6,22E-04	0	2,53E-04	0	0	4,87E-02	0,00E+00	3,99E-07	3,67E-06	4,77E-07	-9,04E-05

## END-OF-LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0	0,00E+00	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	1,12E+02	0,00E+00	2,05E-01	1,12E+02	0,00E+00	1,79E+00	0,00E+00	0,00E+00	0	6,78E-01	0	0	0,00E+00	0,00E+00	0,00E+00	1,02E+00	0,00E+00	0,00E+00
Materials for energy rec.	kg	1,14E-02	0,00E+00	4,23E-02	5,37E-02	0,00E+00	3,00E-02	0,00E+00	0,00E+00	0	2,96E+00	0	0	0,00E+00	0,00E+00	0,00E+00	2,64E+00	0,00E+00	0,00E+00
Exported energy	MJ	2,31E-01	0,00E+00	0,00E+00	2,31E-01	0,00E+00	9,30E-01	1,70E+02	8,20E+01	0	5,37E+01	0	0	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

## ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global warming pot.	kg CO <sub>2</sub> e	4,11E+01	3,81E-01	1,99E+00	4,35E+01	1,59E+00	1,47E-01	2,45E+03	2,51E+01	0	2,32E+01	0	0	6,65E+02	0,00E+00	1,28E-01	6,96E+00	1,26E-01	-2,32E+00
Ozone depletion pot.	kg CFC-11e	4,09E-06	6,37E-09	4,24E-08	4,14E-06	2,66E-08	3,41E-10	1,73E-05	1,43E-05	0	3,67E-07	0	0	6,82E-06	0,00E+00	1,52E-09	3,70E-09	2,92E-09	-8,68E-09
Acidification	kg SO <sub>2</sub> e	1,43E-01	7,18E-04	6,50E-03	1,51E-01	2,99E-03	1,58E-04	1,64E+01	7,73E-02	0	4,55E-02	0	0	2,72E+00	0,00E+00	3,36E-04	1,92E-03	6,66E-04	-6,04E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	1,00E+00	1,79E-04	4,88E-03	1,01E+00	7,48E-04	5,16E-05	6,03E+00	4,71E-02	0	1,62E+00	0	0	1,32E+01	0,00E+00	8,19E-05	5,77E-04	2,12E-04	-3,73E-03
POCP ('smog')	kg C <sub>2</sub> H <sub>4</sub> e	1,02E-02	7,32E-05	6,13E-04	1,09E-02	3,05E-04	2,19E-05	9,63E-01	5,74E-03	0	6,10E-03	0	0	1,91E-01	0,00E+00	2,99E-05	1,50E-04	6,29E-05	-2,79E-03
ADP-elements	kg Sbe	4,27E-04	1,07E-06	8,16E-06	4,36E-04	4,47E-06	4,55E-07	4,65E-03	6,05E-04	0	9,98E-05	0	0	3,38E-03	0,00E+00	3,51E-07	1,88E-06	1,98E-07	-8,40E-04
ADP-fossil	MJ	6,67E+02	5,65E+00	2,51E+01	6,98E+02	2,35E+01	3,92E-01	2,39E+04	3,00E+02	0	2,35E+02	0	0	6,30E+03	0,00E+00	1,85E+00	3,10E+00	3,08E+00	-2,39E+01

## ENVIRONMENTAL IMPACTS – FRENCH NATIONAL COMPLEMENTS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
ADP-elements	kg Sbe	3,58E-04	1,07E-06	8,16E-06	3,67E-04	4,47E-06	4,55E-07	4,65E-03	6,05E-04	0	9,98E-05	0	0	3,38E-03	0,00E+00	3,51E-07	1,88E-06	1,98E-07	-8,40E-04
Hazardous waste disposed	kg	2,62E+00	8,34E-03	1,16E-01	2,75E+00	3,48E-02	6,23E-03	0,00E+00	1,02E+00	0	1,37E+00	0	0	5,56E+01	0,00E+00	3,17E-03	1,31E-01	3,44E-03	-4,69E-01
Non-haz. waste disposed	kg	3,18E+01	1,67E-01	3,60E+00	3,56E+01	6,96E-01	1,98E-01	5,78E+03	1,80E+02	0	2,68E+01	0	0	1,07E+06	0,00E+00	5,87E-02	3,77E+00	7,86E-02	-2,26E+01
Air pollution	m <sup>3</sup>	4,45E+03	8,82E+01	5,03E+02	5,04E+03	3,68E+02	1,53E+01	1,22E+06	4,47E+03	0	4,40E+03	0	0	1,78E+05	0,00E+00	3,11E+01	9,20E+01	2,89E+01	-3,08E+03
Water pollution	m <sup>3</sup>	1,02E+02	3,15E+00	1,98E+01	1,25E+02	1,31E+01	2,44E-01	9,87E+03	2,14E+02	0	1,25E+02	0	0	1,18E+04	0,00E+00	8,60E-01	1,79E+00	1,58E+00	-2,13E+01

## ANNEX:

### RESULTS FOR ALTERNATIVE USE STAGE SCENARIO

#### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	B1	B2	B3	B4	B5	B6	B7
GWP <sup>1)</sup> -total	kg CO <sub>2</sub> e	1,20E+03	2,53E+01	0	2,33E+01	0	0	4,02E+02
GWP-fossil	kg CO <sub>2</sub> e	1,17E+03	2,52E+01	0	2,32E+01	0	0	4,01E+02
GWP-biogenic	kg CO <sub>2</sub> e	-9,49E-20	0,00E+00	0	1,11E-16	0	0	0,00E+00
GWP-luluc <sup>2)</sup>	kg CO <sub>2</sub> e	3,18E+01	4,74E-02	0	3,38E-02	0	0	6,88E-01
Ozone depletion pot.	kg CFC-11e	1,70E-05	2,14E-05	0	4,36E-07	0	0	5,45E-06
Acidification potential	mol H <sup>+</sup> e	5,66E+00	9,95E-02	0	5,71E-02	0	0	2,34E+00
EP <sup>3)</sup> -freshwater	kg Pe	6,43E-01	5,54E-03	0	3,65E-03	0	0	1,03E+00
EP-marine	kg Ne	1,59E+00	2,34E-02	0	1,41E-02	0	0	1,29E+01
EP-terrestrial	mol Ne	1,30E+01	2,27E-01	0	1,37E-01	0	0	5,97E+00
POCP <sup>4)</sup> ('smog')	kg NMVOCe	3,51E+00	6,80E-02	0	5,20E-02	0	0	1,45E+00
ADP-minerals & metals	kg Sbe	3,65E-03	6,11E-04	0	1,03E-04	0	0	2,34E-03
ADP <sup>5)</sup> -fossil resources	MJ	1,47E+04	3,42E+02	0	2,53E+02	0	0	6,42E+03
Water use	m <sup>3</sup> e depr.	7,40E+02	1,61E+01	0	1,90E+01	0	0	2,18E+02

## VERIFICATION STATEMENT

### VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier. The process involved reviewing results, documents and compliance with the reference standards, ISO 14025, ISO 14040 and ISO 14044 following the process and checklists of the programme operator for:

- This Environmental Product Declaration
- The Life Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online.](#)

This EPD has been generated by the One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

### THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Sarah Curpen, as an authorised verifier acting for EPD Hub Limited

02.05.2025

